




LS25 DC24V Modular Specification



LS25 DC 24V



- 25mm slender lighting surface.
- 105 Lm/w high light efficiency design , lumen output up to 2100 Lm/m.
- Multiple standard corner (L type , X type , T type optional) available for free connection.
- Multiple light distribution options (Diffuser , Microprism, Grating 30°, Grating 60°, Block frosted diffuser) to meet variety application requirements.
- Electric wire& suspension wire with two-in-one design, invisible and beautiful.

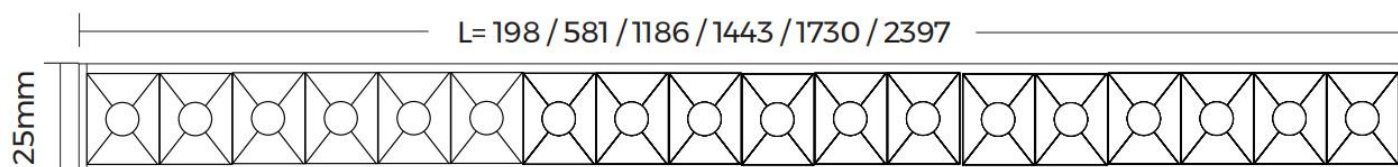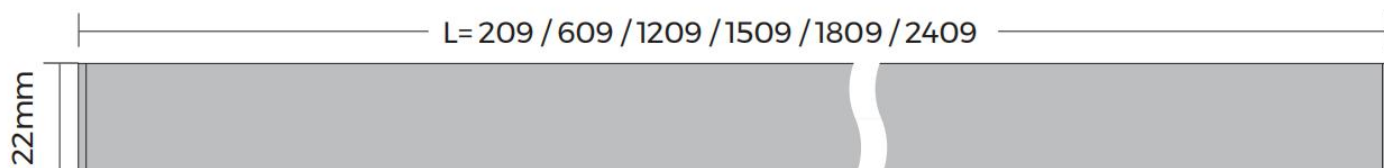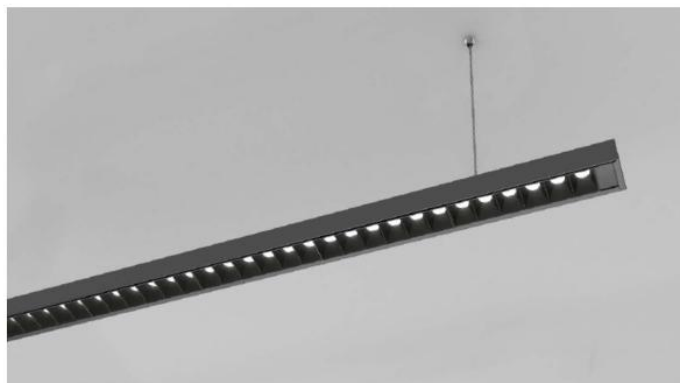


- 25mm slender lighting surface
- 105 Lm/w high light efficiency design , lumen output up to 2100 Lm/m .
- Multiple standard corner (L type , X type , T type optional) available for free connection .
- Multiple light distribution options (Diffuser , Microprism, Grating 30°, Grating 60°, Block frosted diffuser) to meet variety application requirements .
- Electric wire& suspension wire with two-in-one design, invisible and beautiful .

Optical & electronic data


		600mm	1200mm	1500mm	1800mm	2400mm	L*(277*277mm)	T*(529*277mm)	X*(529*529mm)
Diffuser		12W/1250LM	24W/2500LM	30W/3150LM	36W/3750LM	48W/5000LM	11W/1155LM	16W/1680LM	21W/2205LM
Microprism		12W/1250LM	24W/2500LM	30W/3150LM	36W/3750LM	48W/5000LM	11W/1155LM	16W/1680LM	21W/2205LM
Grating 30°		12W/850LM	24W/1700LM	30W/2100LM	36W/2500LM	48W/3500LM	/	/	/
Grating 60°		12W/700LM	24W/1400LM	30W/1800LM	36W/2300LM	48W/3100LM	/	/	/
Block frosted diffuser		12W/1200LM	24W/2400LM	30W/3000LM	36W/3600LM	48W/4800LM	/	/	/
Blind cover		/	/	/	/	/	Available	Available	Available

Remark:


- 1、 the tolerance of output data can be vary up to 10%;
- 2、 the output data is typical value

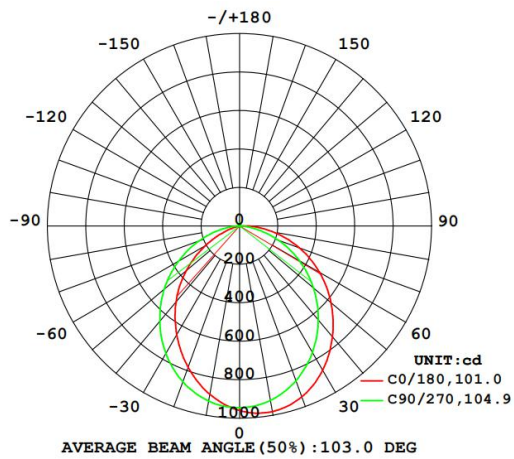


1.2m luminaire with Diffuser

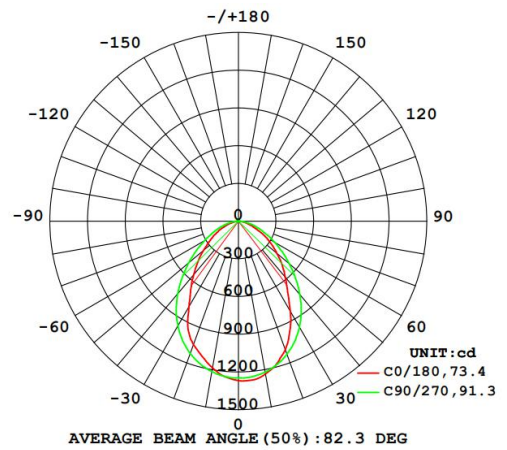


1.2m luminaire with Microprism

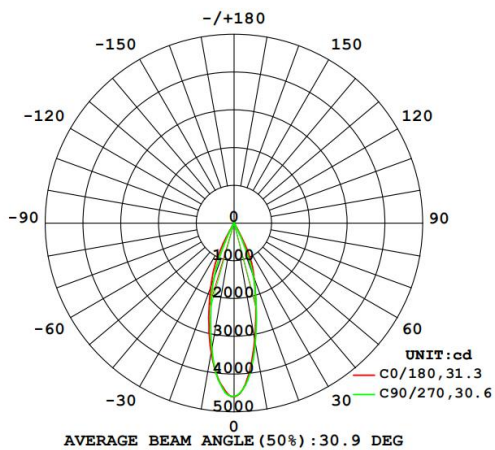

1.2m luminaire with Grating 30°

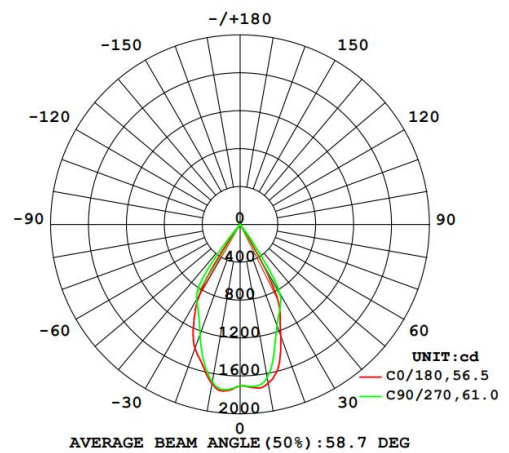

1.2m luminaire with Grating 60°

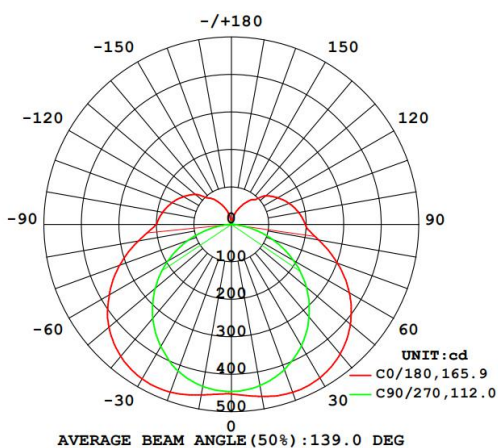

1.2m luminaire with Block frosted diffuser

Packing:



Cover	Length	Type	Size(mm)	Pcs/bundle	NW(kg)	GW(kg)	Size (whole package)
Diffuser / Microprism,	609mm	BOX	680*41*27.5mm	20pcs	/	/	680*210*120mm
	1209mm	BOX	1280*41*27.5mm	20pcs	/	/	1280*210*120mm
	1509mm	BOX	1580*41*27.5mm	20pcs	/	/	1580*210*120mm
	1809mm	BOX	1880*41*27.5mm	20pcs	/	/	1880*210*120mm
	2409mm	BOX	2580*41*27.5mm	20pcs	/	/	2580*210*120mm
Block frosted diffuse	609mm	BOX	680*52*43mm	20pcs	/	/	680*260*180mm
	1209mm	BOX	1280*52*43mm	20pcs	/	/	1280*260*180mm
	1509mm	BOX	1580*52*43mm	20pcs	/	/	1580*260*180mm
	1809mm	BOX	1880*52*43mm	20pcs	/	/	1880*260*180mm
	2409mm	BOX	2580*52*43mm	20pcs	/	/	2580*260*180mm
Grating	581mm	BOX	660*41*27.5mm	20pcs	/	/	660*210*120mm
	1186mm	BOX	1260*41*27.5mm	20pcs	/	/	1260*210*120mm
	1443mm	BOX	1520*41*27.5mm	20pcs	/	/	1520*210*120mm
	1730mm	BOX	1810*41*27.5mm	20pcs	/	/	1810*210*120mm
	2397mm	BOX	2580*41*27.5mm	20pcs	/	/	2580*210*120mm

Description about label information

LLS-LS5470(F)

Luminous flux: 1880LM
 Power(Typ): 36W
 CCT: 4000K
 CRI: >80
 Input voltage: 100-277VAC
 Frequency: 50/60Hz

Type: Luminaire
 Part NO: LLS-LS5470DFSS1200(F)-R36NW8D-CC
 SO: YO17050147
 NO: ZWL170510-0380
 Color: Silver
 Power factor: >0.95
 Cover type: Diffuser
 Size: 54x70x1207mm

Ordering code:

Category	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Light Source Type	Light Source Power	CCT	CRI	Power Type	Package	Label Type
LLS	Pendant	LS 25	Flat	Diffuser D	NO Carrier X	Silver S	Holeless end cap S	600mm	24VDC flexible strip F	20W/m 20	2700K SW	>80 8	No Power X	SEL Individual L	SEL L
			Grating G	Micro-prism P	Carrier F	White W		1200mm	24VDC Rigid module R		3000K WW	>90 9			Customized S
			Square K	30° F		Black B		1500mm			4000K NW				
				60° H				1800mm			5000K DW				
								2400mm			6500K W				
LLS	-	LS 25	F	D	X	S	S	2400	F	20	NW	8	X	L	L

Ordering luminaires kits

LLS-LS25FDXSS2400-F20NW8X-LL

🔍

Attentions:

- Please install the product in the right environment as much as possible;
- Please be careful during operation. Do not touch the AC power supply in case of electric shock;
- Check the current through the circuit, such as the surge occurs when press the switch does not exceed the maximum rated current, please insert the appropriate protection circuit;
- This product is sensitive to static electricity, and please special attention. In particular, it will damage the product when the static electricity is more than absolute maximum rated current and voltage, please make a countermeasures to avoid the damage of the static electricity and surge when using the product.