


Specification



LS60

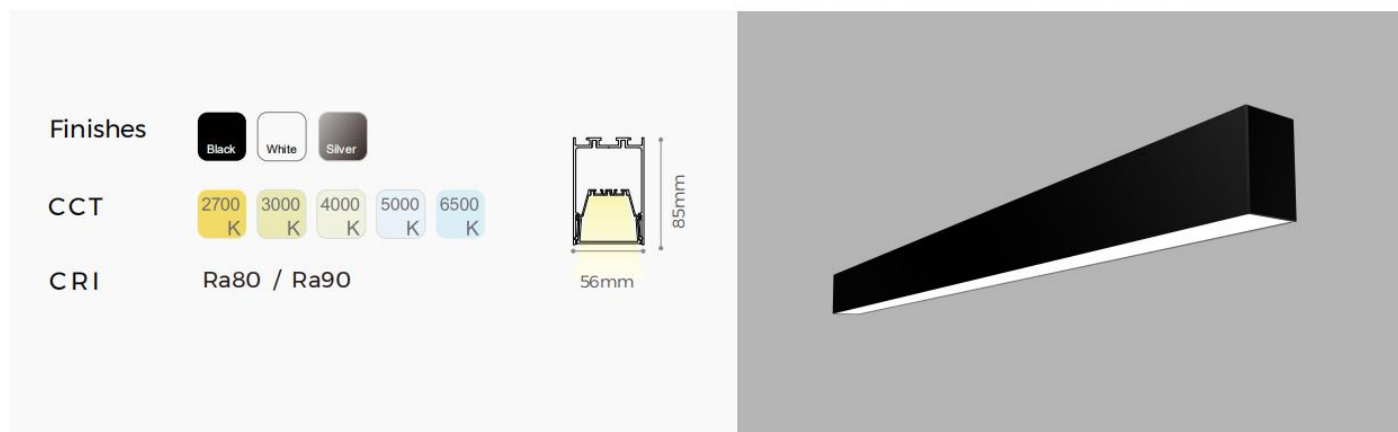


- AL6063-T5 aluminum profile with high-quality surface treatment process, multiple colors optional, such as black, white, silver etc.
- High light efficacy design, up to 125 lm/W.
- Five standard corner styles options (L-type, X-type, T-type), realize free splicing in three-dimensional and plane.
- Multiple optical styles optional(diffuser, microprism, grating 12°/24°/38°, asymmetric , double asymmetric), meet the needs of multiple applications.

Optical & electronic data :


								
	Diffuser	Microprism	Louven	Grating 12°	Grating 24°	Grating 38°	Asymmetric	Double asymmetric
1200mm	37W/ 3885LM	37W/ 3300LM	38W/ 2600LM	30W/ 2850LM	30W/ 3000LM	30W/ 2700LM	27W/ 3100LM	27W/ 3500LM
2400mm	68W/ 7150LM	68W/ 6120LM	/	/	/	/	/	/

Remark :


- 1、 the tolerance of output data can be vary up to 10%;
- 2、 the output data is typical value;

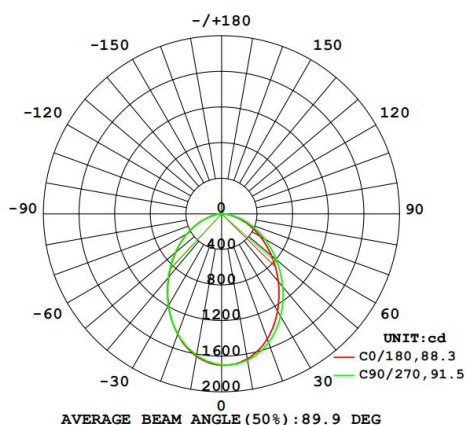


1.2m luminaire with Diffuser

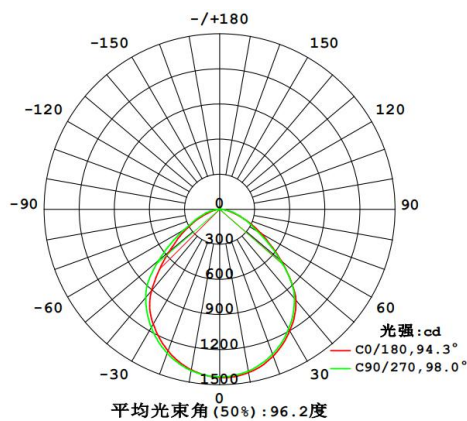


1.2m luminaire with Microprism

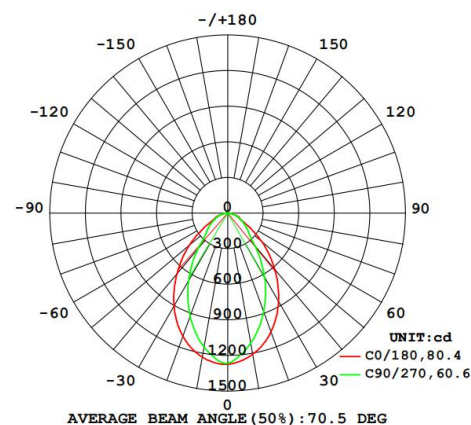


1.2m luminaire with Louven

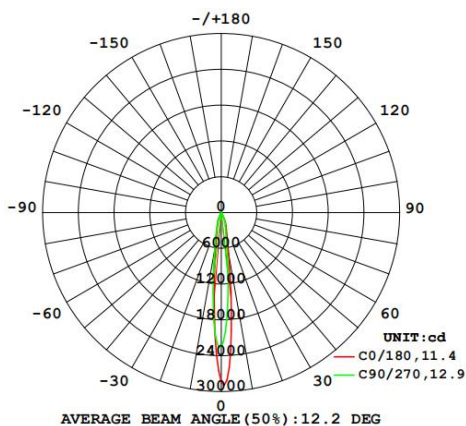


1.2m luminaire with Grating 12°

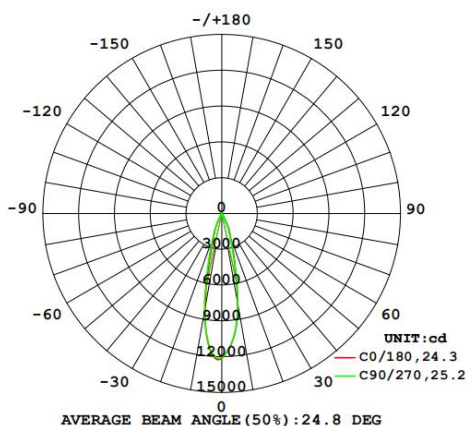


1.2m luminaire with Grating 24°

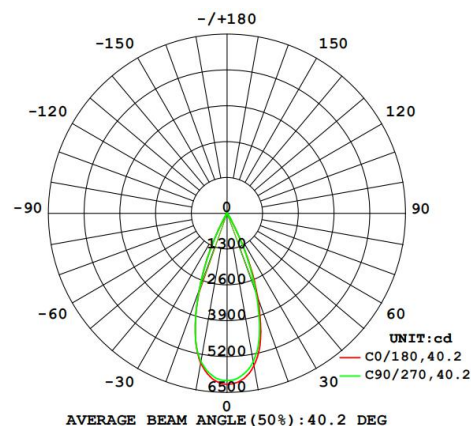

1.2m luminaire with Grating 38°

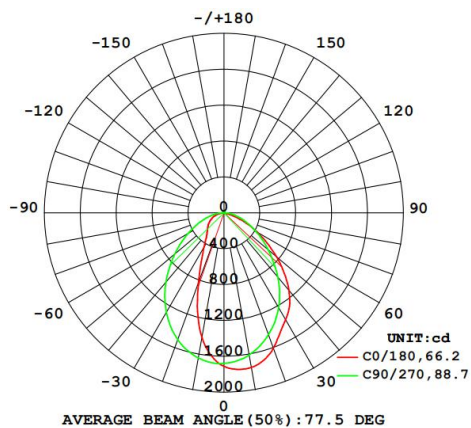

1.2m luminaire with Asymmetric

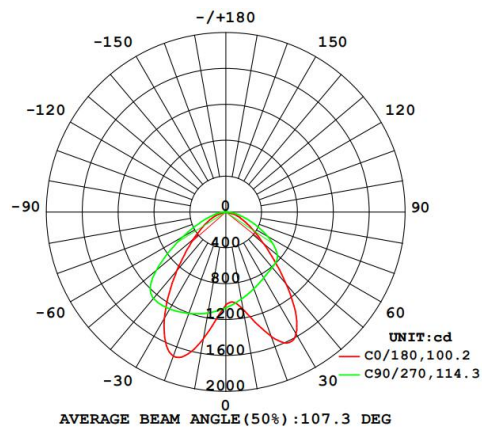

1.2m luminaire with Double Asymmetric

Description about label information :

LLS-LH25		sel LIGHTING	
Luminous flux(up):	3850LM	Type:	Luminaire
Luminous flux(down):	5000LM	Part NO:	LLS-LH25FPXB52400-F40W8X-DC
Power(Typ):	40W/M	SO:	
CCT:	6500K	NO:	
CRI:	>80	Color:	Black
Input voltage:	24VDC	Cover type:	Microprism
		Size:	25x100x2413mm
		Date:	
		Terminal block not included.	
		Installation must be performed by a qualified person.	

Ordering code :

Category			Series			Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length		Light Source Type		Light Source Power		CCT		CRI		Power Type		Package		Label Type	
Stylish Lighting system	LLS	-	Pendant	LS	60	Flat	F	Diffuser	D	NO Carrier	X	Silver	S	Holeless end cap	S	1200MM	-	Constant Current strip	T	68W	68	2700K	SW	>80	8	0-10V Dimming	B	-	SE L Individual	L	SE L	L	
						Lens	L	Micro-prism	P	Carrier	F	Black	B			2400MM						3000K	WW	>90	9							Customized	S
						Grating	G	12"	E			White	W									4000K	NW										
						Louven	B	24"	F													5000K	DW										
								38"	H														6500K	W									
					Transparent	T																											
	LLS	-		LS	60	F		D		F		S		S	2400	-		T		68		NW		8		B	-		L		L		

Ordering luminaires kits

LLS-LS60DFSS2400-T68NW8B-LL



Attentions :

- Please install the product in the right environment as much as possible ;
- Please be careful during operation. Do not touch the AC power supply in case of electric shock ;
- Check the current through the circuit, such as the surge occurs when press the switch does not exceed the maximum rated current, please insert the appropriate protection circuit ;
- This product is sensitive to static electricity, and please special attention. In particular, it will damage the product when the static electricity is more than absolute maximum rated current and voltage, please make a countermeasures to avoid the damage of the static electricity and surge when using the product.