

Toning Series Specification


DA120RGB

24V-8mm



【General description】

- RGB colorful strip
- Widely adaptable to all types of controllers
- High quality FPC, high thermal 3M adhesive
- Ta: -25~40°C; Tc: 75°C (max)

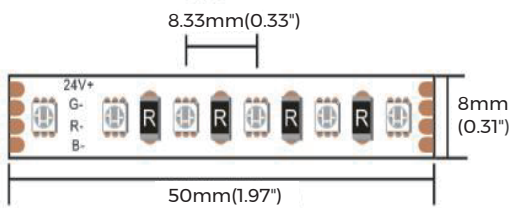

【Dimension】

Input voltage: DC24V

CRI: /

Max.power: 11W(1m)

Power range: 9.1~11W(1m)

Rated current: 0.42A(1m) 1.9A(5m)

Typical Power: 10W(1m) 45.6W(5m)

tape IP: IP20/IP65

On-off times: 10000 (test times)

Warranty: 3years

Max.length: 5000mm(16.4')


Cutting unit: 6leds/50mm(1.97")

LED pitch: 8.33mm(0.33")

Min. bend diameter: Φ60mm(2.36")

Mounting: 3M tape

Copper foil: 2oz

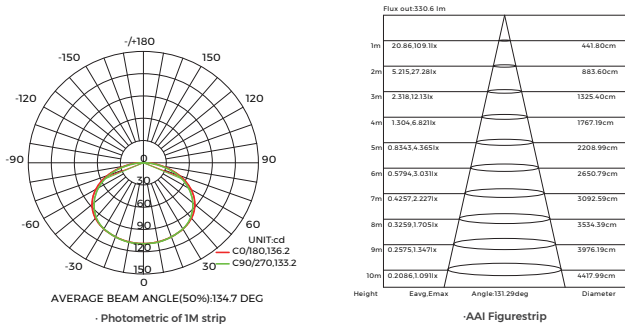


【Photo-electric Parameters】

CRI	Color	CCT	Lumen(lm/m)	Lumen(lm/ft)	lm/W	ErP 2019
/	R	R:620-625nm	80	24	21	/
/	G	G:520-525nm	285	86	88	/
/	B	B:455-460nm	65	19	21	/
/	RGB	/	430	131	43	/

- 1.The tolerance of output data can be vary up to 15%.
- 2.the output data tested according to IES TM-30-15.
- 3.the output data is based on IP20/Imeter, data of 5m in only for reference.
- 4.IP protection process leads changes to size, CCT and luminous flux.


【IP process information】

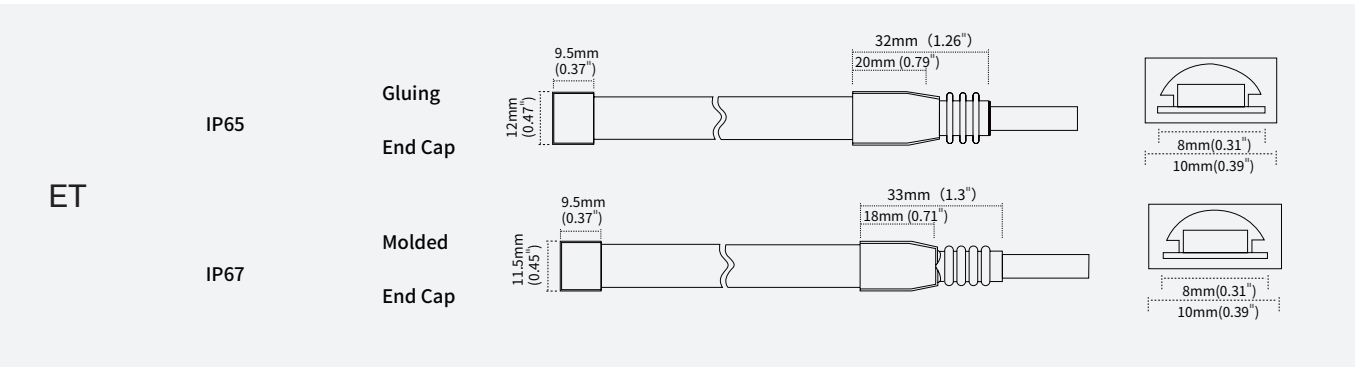

【Electronic & output data】


IP Process	Picture	Picture description	Size	optional CCT/color for finished product	lumen output rate
NO		No proof	8mm*1.5mm	RGB	100%
NA		Nano-proof	8mm*1.5mm	RGB	98%
ET		Extrusion tube	10mm*4.8mm	RGB	88%

【Accessories Information】


Name	Picture	Code	coding	description
Fixed Clip		94-02-00-0002	FSW08SA	Silicone clip, screw: PA 3*8mm, suitable for 8mm FPC,EF/ET strip
Silicone Plug Kit		94-02-00-0044	DT08EA-A	Silicone plug kit, suitable for 8mm board width, ET/EF series silicone extrusion light strip
Silicone stopper kit		94-02-00-0045	DW08EA-A	Silicone tail plug kit, suitable for 8mm board width, ET/EF series silicone extrusion light strip
Mounting groove		94-02-00-0024	CVT08EA-12100100	Transparent PVC mounting groove,suitable for 8mm FPC,silicone extruded EF/ET strip
Stopper glue		94-16-03010001	AS-PG-0003	Silicone gel,suitable for ET/EF/EG waterproof LED strip

【Packing】

SEL brand package

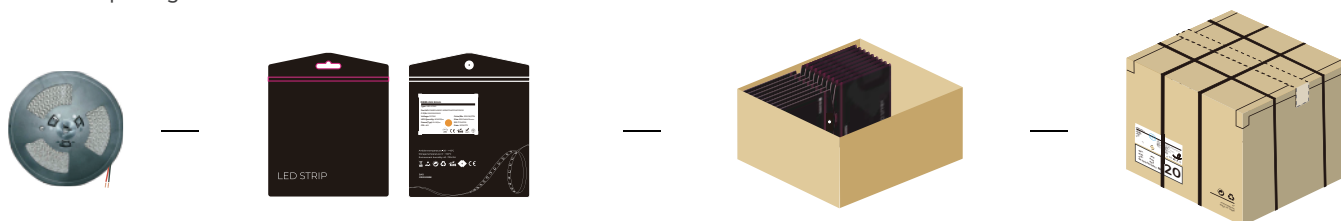

General customized package

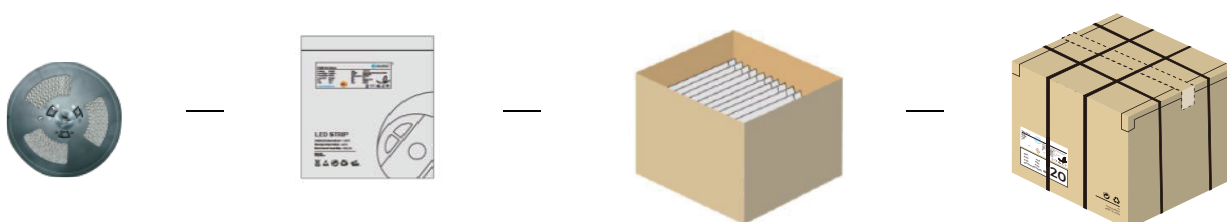

IP Process	Product size(mm)	Product quantity (m/reel)	Product quantity (m/case)	Product net weight(kg)	Net weight per box(kg)	Gross weight(kg)	Package size (cm)
NO	5000*8*1.5	5	300	0.12	7.2	8.28	41*41*26
NA	5000*8*1.5	5	300	0.122	7.32	8.418	41*41*26
ET	5000*10*4.8	5	200	0.445	17.8	20.47	41*41*26

Remark: data with 10% tolerance

【Precautions】

- Please drive the led strip with 24VDC isolated power, and the ripple of the constant voltage source should be less than 5%.
- Please do not bend the strip into an arc with a diameter less than 60mm to ensure the longevity and reliability.
- Do not fold it in case any damage of LED beads.
- Do not pull the power wire hard to ensure the longevity. Any Crash may damage the LED light is prohibited.
- Please make sure the wire is connected to the anode and cathode correctly. The power output should be consistent with the voltage of the strip to avoid damage.
- LED lights should be stored in dry, sealed environment. Please only unpack it before usage. Ambient temperature: -25℃~40℃. Storage temperature: 0℃~60℃. Please use the strips without waterproof within indoor environment with humidity less than 70%.
- Please be careful during operation. Do not touch the AC power supply in case of electric shock.
- Please leave at least 20% power for the power supply during using to ensure there is enough power supply to drive the product.
- Do not use any acid or alkaline adhesives to fix the product (e.g.: glass cement).
- Do not scratch the product when IP process of the product is NA. Ultraviolet rays will damage the nano-layers on the product and seriously affect the life of the product.